

J4 2TN

Wired

RS485

Dry contact

RTS

io

SOLUTIONS FOR COMMERCIAL BUILDINGS

The solution for motorization of external Venetian blind Type 3.



Applications



external venetian blinds



Type 3

• Suitable for the following headrails: SCHENKER (78 x 67 mm), HUNTER DOUGLAS (57 x 51 mm), STOREN MATERIAL (58 x 56 mm), GRIESSER (67 x 66 mm).

Main characteristics

- > The easiest external Venetian blind actuator of the SOMFY range
- > Safety stop (snow between slats, etc...) via a mushroom
- > No mechanical settings :
 - Bottom end-limit already set in factory
 - Second bottom end-limit position already set as -180° from bottom end-limit position
 - Upper end-limit setting with a mushroom (accessory for height adjustment)
- > Easy integration :
 - The shortest motor available on the market
- Fast connection (plug and play) with Hirschmann plugs
 - No end-limit settings


Certifications



somfy®

CHARACTERISTICS

Supply voltage	230 V AC / 50 Hz
Degree of protection	IP 54
Operating temperature	20% -20 to 70°C 80% -10 to 40°C
Protection class	Class I
Limit switch unit	Mechanic
Conformity	www.somfy.com/ce

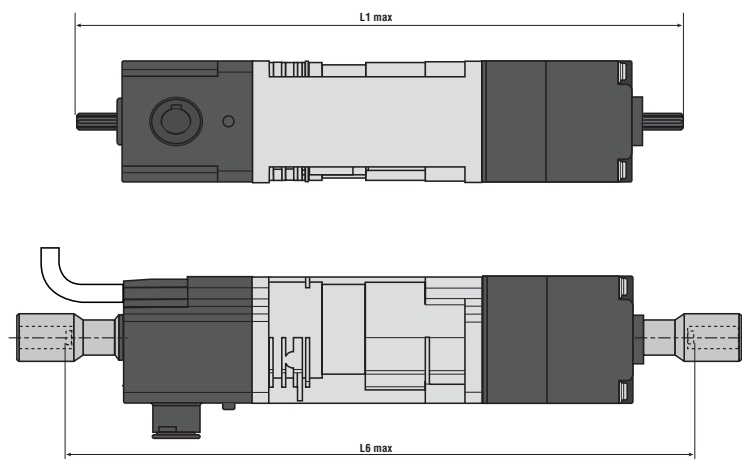


Performance

Nominal voltage	230 V / 50 Hz		
Torque	6 Nm	10 Nm	18 Nm
Speed	24 rpm	24 rpm	24 rpm

Dimensions

L1 (in mm)	254	269	289
L6 (in mm)	265	280	300

Type of cable



1	Down (open)	Black
2	Down (closed)	Black
3	Up	Brown
4	Neutral	Blue
⏏	Earth	Green / Yellow