

Screen 40 Job

Wired

RS485

Dry contact

RTS

io

SOLUTIONS FOR COMMERCIAL BUILDINGS

Economic offer in diameter 40 mm for the motorization of external blinds specially dedicated to job offers.



Applications



external
vertical
screens

- Suitable for tubes diameter 50 mm or more
- For vertical screen with or without box and Zip applications
- Can be used for windows up to 15 m²

Main characteristics

- > High speed motor
- > Sold only by 100 pieces
- > Progressive set limits thanks to the progressive adjusting knob on the head
- > Hirschman plug available


Certifications



somfy®

CHARACTERISTICS

Supply voltage	230 V AC / 50 Hz
Degree of protection	IP 44
Operating temperature	20% -25 to 70°C 80% -10 to 40°C
Protection class	Class I
Limit switch unit	Progressive
Conformity	www.somfy.com/ce

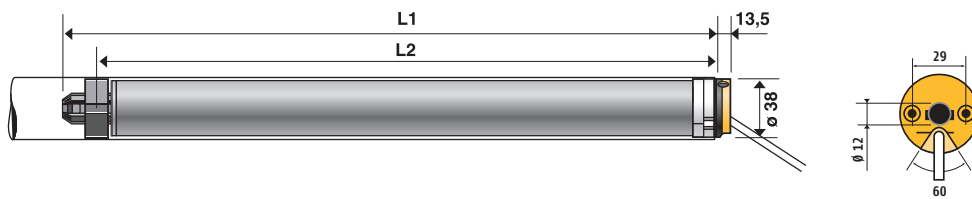

Performance


Nominal voltage	230 V / 50 Hz
Torque	5 Nm
Speed	14 rpm

Dimensions

L1 (in mm)	453
L2 (in mm)	433


Type of cable

4 threads by wire



Hirschman plug

Hirschman Blue BV



Hirschman Black GmbH

